



3 STANDARD **4** TH



K-Flo

HIGH PERFORMANCE WITH QUIET OPERATION

- **Twist-Lock cover**, rapid access (no tools required)
- **Impeller and diffuser made of Noryl®**, very hard-wearing and corrosion-free
- **Suitable for use in salt water**, corrosion proof seal assembly
- **Direct replacement** for KS pumps
- **Unions fittings provided**
- Recommended for pools **up to 195 m³***

* Calculation based on 6 hours turnover




See-through Twist-Lock strainer cover




Double drain with easy opening (no tools required)



Unions kit included (50 or 63 mm)

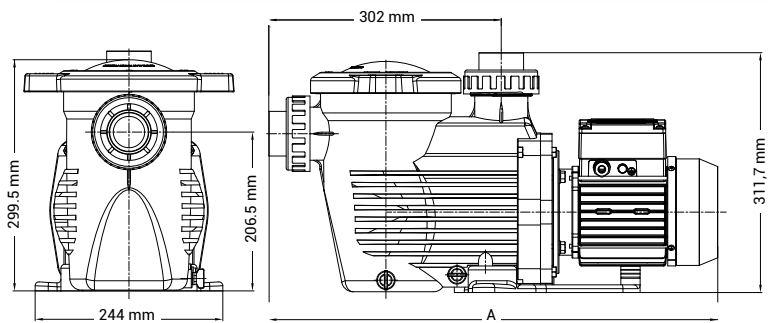

Pressure (mbar)

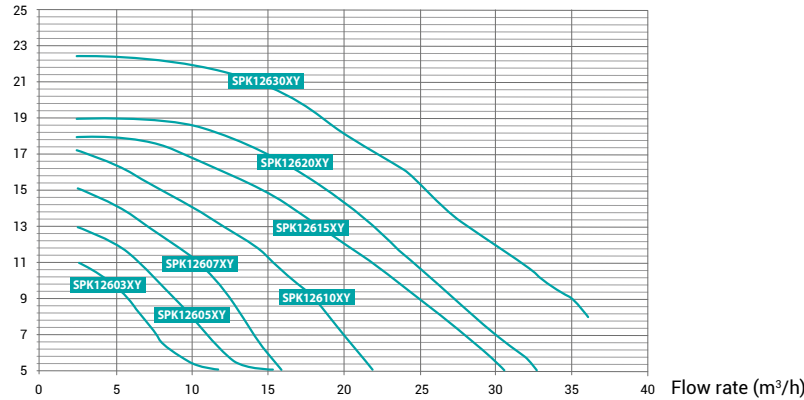

THIS PUMP MODEL EXISTS IN VARIABLE SPEED

Technical Specifications

Max. water temp.	35°C
Mechanical seal	AlSi 316, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IP55, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl®+GF/PP/SAN®
Pre-filter size	3.5 L

	Type	Side A	Weight	Fitting*	Flow rate*	Input Power P1	Output Power P2	Amperage	Quantity per pallet	Item
SINGLE PHASE K-FLO	1/3 HP	543 mm	11.2 kg	50 mm	4.8 m ³ /h	485 W	245 W	2.5 A	20	SPK12603XY1
	1/2 HP	590 mm	12.5 kg	50 mm	7.5 m ³ /h	610 W	385 W	3.2 A	20	SPK12605XY1
	3/4 HP	590 mm	13.5 kg	50 mm	11.5 m ³ /h	820 W	570 W	3.8 A	20	SPK12607XY1
	1 HP	590 mm	14 kg	50 mm	15.4 m ³ /h	1090 W	760 W	5 A	20	SPK12610XY1
	1.5 HP	620 mm	16.5 kg	63 mm	21.9 m ³ /h	1610 W	1110 W	7.5 A	20	SPK12615XY1
	2 HP	620 mm	22.5 kg	63 mm	25.7 m ³ /h	1880 W	1500 W	9 A	20	SPK12620XY1
	3 HP	620 mm	25 kg	63 mm	33 m ³ /h	2750 W	2150 W	12.5 A	20	SPK12630XY1
THREE PHASE K-FLO	1/2 HP	590 mm	12.5 kg	50 mm	7.5 m ³ /h	610 W	385 W	2.45/1.4 A	20	SPK12605XY3 IE2✓
	3/4 HP	590 mm	13.5 kg	50 mm	11.5 m ³ /h	820 W	570 W	3/1.7 A	20	SPK12607XY3 IE2✓
	1 HP	620 mm	16.5 kg	50 mm	15.4 m ³ /h	1090 W	760 W	3.4/2 A	20	SPK12610XY3 IE3✓
	1.5 HP	620 mm	19 kg	63 mm	21.9 m ³ /h	1610 W	1110 W	5/2.9 A	20	SPK12615XY3 IE3✓
	2 HP	620 mm	25 kg	63 mm	25.7 m ³ /h	1880 W	1500 W	6.1/3.5 A	20	SPK12620XY3 IE3✓
	3 HP	620 mm	27 kg	63 mm	33 m ³ /h	2750 W	2150 W	8.3/5.0 A	20	SPK12630XY3 IE3✓

* under 10 m water column pressure

LPRK Smart retrofit kit: use it with the K-Flo to replace easily old pumps on existing installations

SMART RETROFIT KIT

Item	Pumps to replace	Kit content	Kit per box
LPRK	Astral Victoria Plus, Astral Victoria Plus Silent, Saci Winner	Smart Base 45 (1), Fixing screw (3), RC50 (2), O-ring Seal (2)	10

LPRK is valid to retrofit installations Ø 50 mm, commonly used for pumps up to 1 HP

