

MaxFlo[®] XL



MAKES LIFE EASIER

- **Optimised design and hydraulics**
- **Twist-lock opening cover** for easy maintenance
- Recommended for pools up to 100 m³*

* Calculation based on 6 hours turnover





Easy-to-service
Design provides simple
installation




See-through strainer
cover



Drain plugs for an
easy wintering

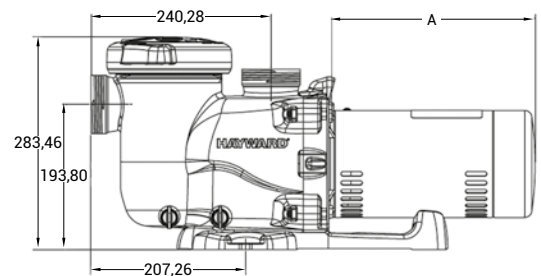

**THIS PUMP MODEL
EXISTS IN VARIABLE SPEED**

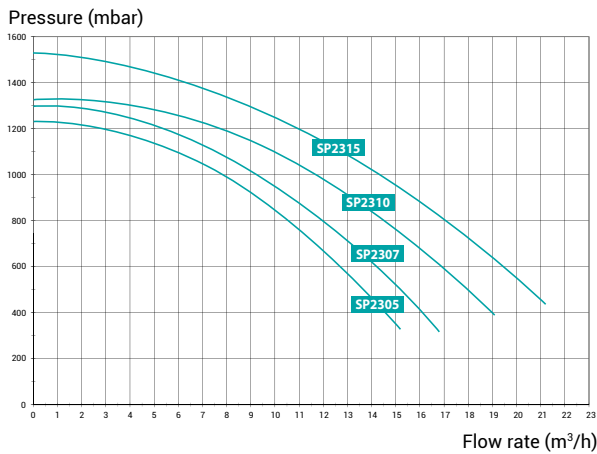

Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 304, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IP55, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl [®] + GF/ABS/PC
Prefilter size	1.5 L

	Type	Dim. A	Weight	Fittings	Flow rate*	Input Power P1	Output Power P2	Amperage	Quantity per pallet	Item
SINGLE PHASE MAXFLO [®] XL	1/2 HP	220 mm	12.9 kg	50 mm	10.5 m ³ /h	630 W	380 W	2.6 A	24	SP2305XE81
	3/4 HP	220 mm	12.9 kg	50 mm	12 m ³ /h	700 W	570 W	2.9 A	24	SP2307XE111
	1 HP	247 mm	13.9 kg	50 mm	14.5 m ³ /h	810 W	720 W	4.3 A	24	SP2310XE161
	1.5 HP	247 mm	14.07 kg	50 and 63 mm	17 m ³ /h	975 W	790 W	5 A	24	SP2315XE221
THREE PHASE MAXFLO [®] XL	3/4 HP	216 mm	11.4 kg	50 mm	12.8 m ³ /h	650 W	570 W	2.1/1.2 A	24	SP2307XE113 IE2 ✓
	1 HP	216 mm	12.02 kg	50 mm	14.5 m ³ /h	700 W	690 W	3/1.7 A	24	SP2310XE163 IE3 ✓
	1.5 HP	247 mm	13.2 kg	50 and 63 mm	16.2 m ³ /h	830 W	790 W	3.3/1.9 A	24	SP2315XE223 IE3 ✓

* under 8 m water column pressure